


Three Channel CT Clamp V3

Part No: CTV3. [868]-[902]-[928].3CH.[060A]-[200A]-[600A]

The Pressac Sensing V3 Wireless 3 Channel CT Clamp is designed to measure and report the AC current flowing in 3 separate channel's. Powered from any of the measured conductors, the measured current in all 3 channel is reported every 30 seconds. The Pressac Sensing V3 Wireless 3 Channel CT Clamp is easily installed with no disturbance to the measured conductors.

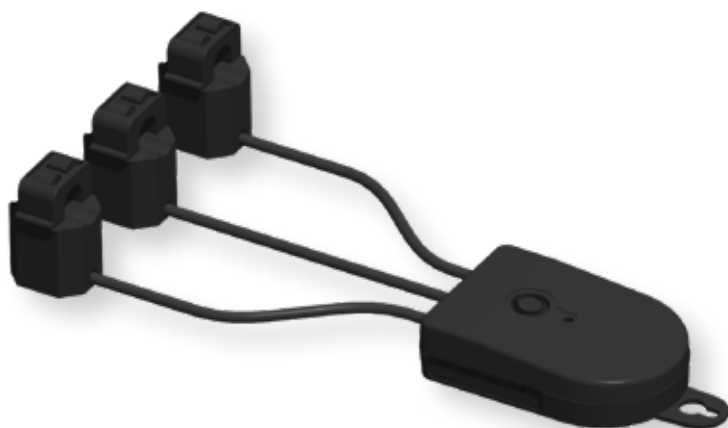

Features and Benefits:

- Energy harvesting – powered from the measured cable
- Wireless communications – low installation costs, no networking required
- Rapid installation straightforward and easy set-up with no disruption
- Pluggable - for ease of installation
- No batteries to replace – no maintenance costs
- Appliance fingerprinting – Monitor the operational costs of each appliance day by day



Functionality:

- Simply clip around any single core cable
- Requires no batteries or wiring
- Requires no interruption to the power supply
- Transmits electrical current value (Amperes) wirelessly using EnOcean® technology

Applications:


- Residential energy monitoring
- Sub Metering
- Plant energy monitoring



Ready for
IBM Watson IoT

Three Channel CT Clamp V3

Part No: CTV3. [868]-[902]-[928].3CH.[060A]-[200A]-[600A]

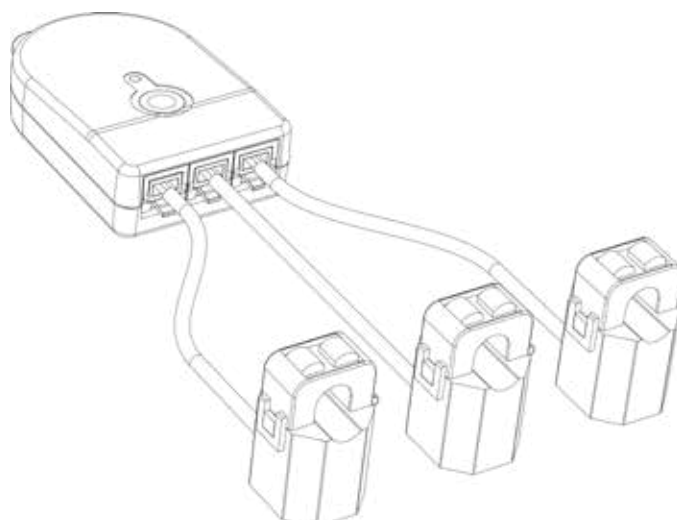

TECHNICAL SPECIFICATIONS

Measurement Range	1A - 60A ; 2A - 200A ; 2A - 600A
Frequency	50Hz or 60Hz
Accuracy - whichever is greater	60A = +/- 0.1A or 2% 200A = +/- 0.1A or 2.5% 600A = +/- 1A or 3%
Transmission Rate	30 Seconds
Reported Value	3 Separate channels in Amps
Repeater	No
Environment	IP 4X
Enclosure Material	Nylon 66
Sample Time	Average of 5 measurements per 30 seconds (Per channel)
Telegram	VLD
Calibration	Not Required
Operating Temperature & Humidity Range	-5°C to +40°C; 85% RH
Storage Temperature & Humidity Range	-20°C to +55°C; 85% RH
Diameter of Measurable Conductor	60A - 10mm or less ; 200A - 24mm or less ; 600A - 36mm or less
Dimensions of Clamp	60A - 25mm x 22mm x 35mm approx. 200A - 35mm x 45mm x 65mm approx. 600A - 65mm x 41mm x 85mm approx.
Dimensions of Case	80mm x 55mm x 20mm approx.
EEP	D2-32-02



Pressac Sensing products incorporate EnOcean® wireless technology, and are fully compliant with EnOcean® protocols. The Pressac Sensing range can be integrated with EnOcean® products from over 300 global manufacturers.

EnOcean® is a widely established and global technology, and has been installed in over 250,000 buildings worldwide. The EnOcean® wireless standard is the first to be ratified as an international standard - ISO/IEC 14543-3-10: together with the EnOcean® Equipment Profiles (EEPs) drawn up by the EnOcean® Alliance, this international standard lays the foundation for fully interoperable, open wireless technology comparable to standards such as Bluetooth and WiFi. The standard can be downloaded from www.iso.org.



Pressac Communications Limited

145 Glaisdale Drive West, Bilborough, Nottingham, NG8 4GY (UK)

+44 (0)115 936 5200 @ enquiries@pressac.com www.pressac.com

Registered in England No. 5623170 VAT No. GB 228 0228 31 Registered Office: 145 Glaisdale Drive West, Bilborough, Nottingham NG8 4GY (UK)



FM79693 EMS71291